


Copper Structured Cabling

Category 6A UTP Keystone Jack Patch Panel 1U 24 Port

UTP CAT6A patch panels are 19 inch rack mountable keystone jack patch panels.

All panels comply with the EIA/TIA standard for Category 6-Augmented and are available in 24 ports. Every patch panel is made with high quality materials, tested and certified .

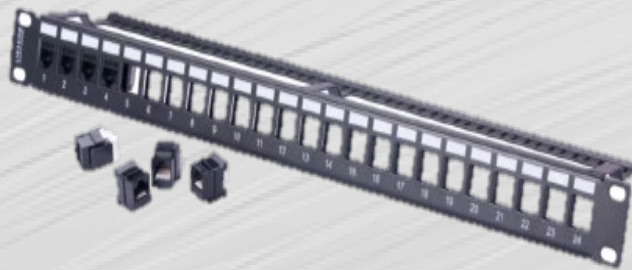

Features & Benefits

- 24 port Cat6A patch panel
- Space-saving high density 1U
- Meets or exceeds the requirement proposed by TIA /EIA 568 B .2 ,ISO/IEC 11801 Category 6A
- Sturdy aluminium plate around jacks
- Phosphor bronze with 6-50 micro inches gold plated
- Available with colour-coded T568A and T658B wiring patterns
- Easy wiring installation, fit for 110 punch-down tools
- Termination accepts 22, 23, 24 and 26 AWG (0.64-0.4) solid wires
- Black electrostatic powder-coated corrosion-resistant steel

Applications

- POTS, T1 & T q fractional
- ASDN basic & primary rate
- 4/16 Mbps Token Ring (IEEE802.5)
- 10 BASE-T (IEEE802.3)
- 100 Mbps TP-PMD
- 10Gbps Ethernet
- 52/155 Mbps ATM (ATM Forum)
- 100 BASE-T4 (Fast Ethernet)
- 100 VG-AnyLAN(IEEE802.12)
- 100 BASE-T (Fast Ethernet)
- 1 Gbps Ethernet (IEEE802.3)

Copper Structured Cabling

Category 6A UTP Keystone Jack Patch Panel 1U 24 Port

Colouring

Pair1	Pair2	Pair3	Pair4
Blue-Blue/White	Orange-Orange/White	Green-Green/White	Brown-Brown/White

Performance

Insertion Life	750 cycles minimum
IDC Life	200 times (22-26 AWG solid wire) minimum
Contact Material	Phosphor Bronze, Gold Plating (0.5mm)
IDC Material	Phosphor Bronze stamp pin (0.35mm)
Housing Material	PC UL94V-0
Panel Material	Black electrostatic powder-coated corrosion-resistant steel
Conformance	EIA/TIA 568A/B wiring standards, ISO/IEC 11801 :2002, EIA/TIA 568B.2.1 :2002, RoHS

Ordering Information

Construction	Panel Style	Category	Port Density
UTP (Unshielded Twisted Pair)	Keystone Jack KSJPP	Category 6A (CAT6A) 6A	1 U 1-24 Ports 1-24

For any queries, please contact Technoline Solutions team using the details below.