

Fiber Management

DOME ENCLOSURE

DER010

PRODUCT SPECIFICATIONS

Model DER10 Dome Enclosure provides protection over direct, branch and terminal connection for cables. They are easy and reliable to install, delivering high mechanical strength against every environmental condition. Widely used in many applications.

APPLICATIONS

- Aerial
- Direct- Burial
- Wall & Terrace Mounting



FEATURES

HQ Polypropylene
Up to 72F
Adjustable Cassettes

BENEFITS

Sturdy IP 68 & IK 10
No Special Tools Required
Protects Fibres in Field




SPECIFICATIONS

Purpose	Aerial, Direct-Burial, Wall & Pipeline Mounting
Capacity	72
Cable Entries	9
Dimensions (mm)	450x230
Weight (kg)	3.2-3.5
Sealing	Mechanical
Material	Polypropylene
Splicing Per Cassette	12,24
Cable Diameter (mm)	φ05~20.5

ENVIRONMENTAL SPECIFICATIONS

Operation (°C)	-40~+65
Installation (°C)	-40~+65

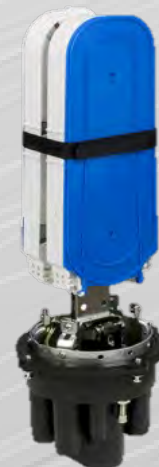

ORDERING INFORMATION

Model	Seal	Cable Entries	Core Size/Capacity
DER010	Mechanical	9	12,24,36,48,60,72,84,96,108,120,132,144

For any queries, please contact Technoline Solutions team using the details below.