

Fiber Management

DOME ENCLOSURE

DER09

PRODUCT SPECIFICATIONS

Model DER09 Dome Enclosure provides protection over direct, branch and terminal connection for cables. They are easy and reliable to install, delivering high mechanical strength against every environmental condition. Widely used in many applications.

APPLICATIONS

- Aerial
- Direct- Burial
- Wall & Terrace Mounting

FEATURES

HQ Polypropylene	Sturdy IP 68 & IK 10
Up to 144F	No Special Tools Required
Adjustable Cassettes	Protects Fibres in Field

BENEFITS




ENVIRONMENTAL SPECIFICATIONS

Operation (°C)	-40~+65
Installation (°C)	-40~+65

SPECIFICATIONS

Purpose	Aerial, Direct-Burial, Wall & Pipeline Mounting
Capacity	144
Cable Entries	5
Dimensions (mm)	450 x 230
Weight (kg)	4.2-4.8
Sealing	Mechanical
Material	Polypropylene
Splicing Per Cassette	24
Cable Diameter (mm)	φ08~17.5

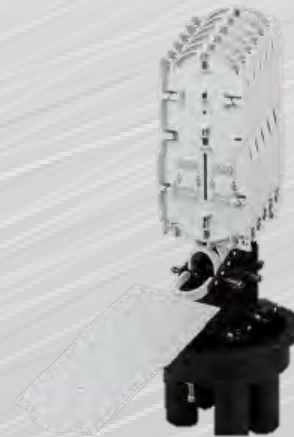

ORDERING INFORMATION

Model	Seal	Cable Entries	Core Size/Capacity
DER09	Mechanical	5	12,24,36,48,60,72,84,96,108,120,132,144

For any queries, please contact Technoline Solutions team using the details below.